


# INSTALLATION TIPS

## ASSEMBLING TWO PIECE COLUMN SHAFT

**TIP:**  
Check sizing carefully to insure the panelled section is at the bottom. The shaft can easily be cut down on site with a chop saw - only cut the upper portion of the column

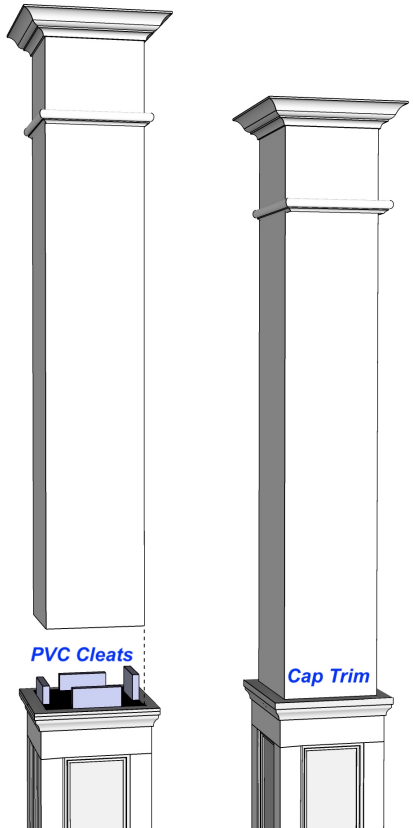

The Cap Trim is to be applied (glued) in place to hide the seam. We supply the glue and the PVC cleats. The PVC cleats lineup the face of the column shaft.

Tip: Use tape to hold in place until the glue cures.